

FEATURE

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation.
- Ultra bright RED or GREEN LEDs.
- Built-in 1.2V1000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Five years warranty for the electrical parts and housing.

FAMILY : **LXA-JEE2**

NOTES:

TYPE: **NEW COMPACT SIZE LED EXIT SIGN**




ORDERING INFORMATION

FAMILY	LENS	HOUSING COLOR
JEE2	R(RED)	BLANK(WHITE)
	G(GREEN)	B(BLACK)
	TYPE	LETTER
	BLANK(AC ONLY)	BLANK(EXIT)
	E(BATTERY BACKUP)	SA(SALIDA)

PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
JEE2RWE	40x33x23cm/6pcs	7.8/6.8kgs
JEE2GWE	40x33x23cm/6pcs	7.8/6.8kgs
JEE2RW AC ONLY	40x33x23cm/6pcs	7.2/6.2kgs
JEE2GW AC ONLY	40x33x23cm/6pcs	7.2/6.2kgs

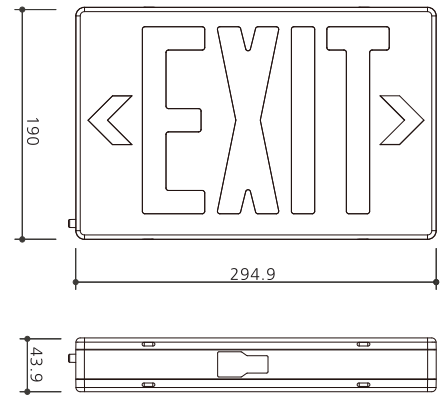

ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME
JEE2RW	120/277V	0.015/0.008A	1.9W	12Pcs Red LEDs	24 Hrs	90 Mins
JEE2GW	120/277V	0.015/0.008A	1.9W	6Pcs Green LEDs	24 Hrs	90 Mins
JEE2RWE	120/277V	0.020/0.020A	1.8W	12Pcs Red LEDs	24 Hrs	90 Mins
JEE2GWE	120/277V	0.020/0.020A	1.8W	6Pcs Green LEDs	24 Hrs	90 Mins
JEE2GW -SA	120/277V	0.015/0.008A	1.9W	6Pcs Green LEDs	24 Hrs	90 Mins

NEW COMPACT SIZE LED EXIT SIGN

LXA-JEE2