

FEATURE

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Letters 6" height with 3/4" stroke. Optional RED or GREEN letters.
- SALIDA faceplate available.
- Single or double face(Universal)
- Universal J-box mounting pattern.
- 120V-277VAC Universal voltage operation.
- 2X1W SMT LED lamp heads for emergency mode.
- Built-in 3.6V1000mAh Ni-Mh battery for minimum 90 minutes emergency operation.
- Built-in 3.6V2000mAh Ni-Mh battery for minimum 90 minutes emergency operation. (JLECE2RWRC)
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Five years warranty for the electrical parts and housing.
- Three years warranty for battery.

ORDERING INFORMATION

FAMILY	LENS	HOUSING COLOR	REMOTE CAPACITY
JLECE	R(RED)	W(WHITE)	BLANK(WITHOUT)
	G(GREEN)	B(BLACK)	RC(WITH REMOTE)

PACKING INFORMATION

MODEL NO.	PACKING INFORMATION	WEIGHTS
JLECE2RW	45X41X23cm/6pcs	6.2/5.2kgs
JLECE2GW	45X41X23cm/6pcs	6.2/5.2kgs
JLECE2RWRC	45X41X23cm/6pcs	8/7kgs
JLECE2GWRC	45X41X23cm/6pcs	8/7kgs


ELECTRICAL INFORMATION

MODEL	RATED VOLTAGE	INPUT CURRENT	INPUT WATT	LED TYPE	CHARGING TIME	EMERGENCY RUN TIME
JLECE2RW	120-277V	0.036A	2.3W	8 LEDs+ 2 lamp heads	24 Hrs	90 Mins
JLECE2GW	120-277V	0.036A	2.3W	8 LEDs+ 2 lamp heads	24 Hrs	90 Mins
JLECE2RWRC	120-277V	0.05A	3.2W	8 LEDs+ 2 lamp heads+2W Remote load	24 Hrs	90 Mins
JLECE2GWRC	120-277V	0.05A	3.2W	8 LEDs+ 2 lamp heads+2W Remote load	24 Hrs	90 Mins

FAMILY : **LXA-JLECE**

NOTES:

TYPE: **NEW SLIM EMERGENCY COMBO**

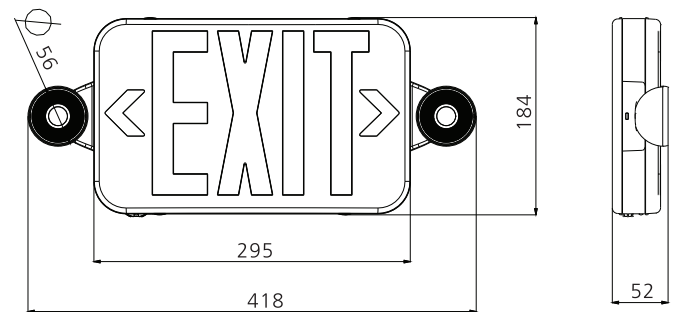

NEW SLIM EMERGENCY COMBO

LXA-JLECE